

WALL CABINETS

CDW-16645.1

Version: 09/25



Loading capacity 60 kg

Rugged construction

Pre-assembled

Various options of accessories

FEATURES

- Size: 600*450
- Capacity: 16U
- Color: Grey / Black
- Load capacity: 60 kg
- Tempered glass front door provides good visibility for observation
- Easy removeable side and front door
- Cable entry access options form top of cabinet
- Safety class rating IP20



Rugged construction



Good visibility



Convenient disassembly




Convenient cable entry



2 Way fan tray



Mounting bracket



L mounting angle



Cantilever shelf

WALL CABINETS

DW16-645

Version: 09/25



STANDARD

Comply with ANSI/EIA RS-310-D, DIN41491; PART1, IEC297-2, DIN41494; PART7, GB/T3047.2-92 standard.
Compatible with metric ETSI and 19inch international standard.

APPLICATION

Widely used in network system, educational system, broadcasting system and telecommunication system.
Suitable for placing server, computer and precision electronic equipments.

MATERIALS

Cool rolled steel
Thickness: mounting rail: 1.2mm
Else in 0.8mm
Tempered smoky-gray glass with thickness of 5mm

ORDER INFORMATION

Capacity (U)	WIDTH (mm)	DEPTH (mm)	PARTNUMBER	CARTON MEASUREMEN W×D×H(mm)	VOLUME (CBM)	Net weight (KG)
12U	600	450	DW16-645	620*470*848	0.25	31

** Please contact us for customized requirement*

COLOR

■■■■■■■ - 1- E	
A=Black(RAL9005)	■■■■■
■■■■■■■ - 2- E	
B=Gray(RAL7035)	■■■■■


WALL CABINETS

DW16-645

Version: 09/25



TECHNICAL DRAWINGS

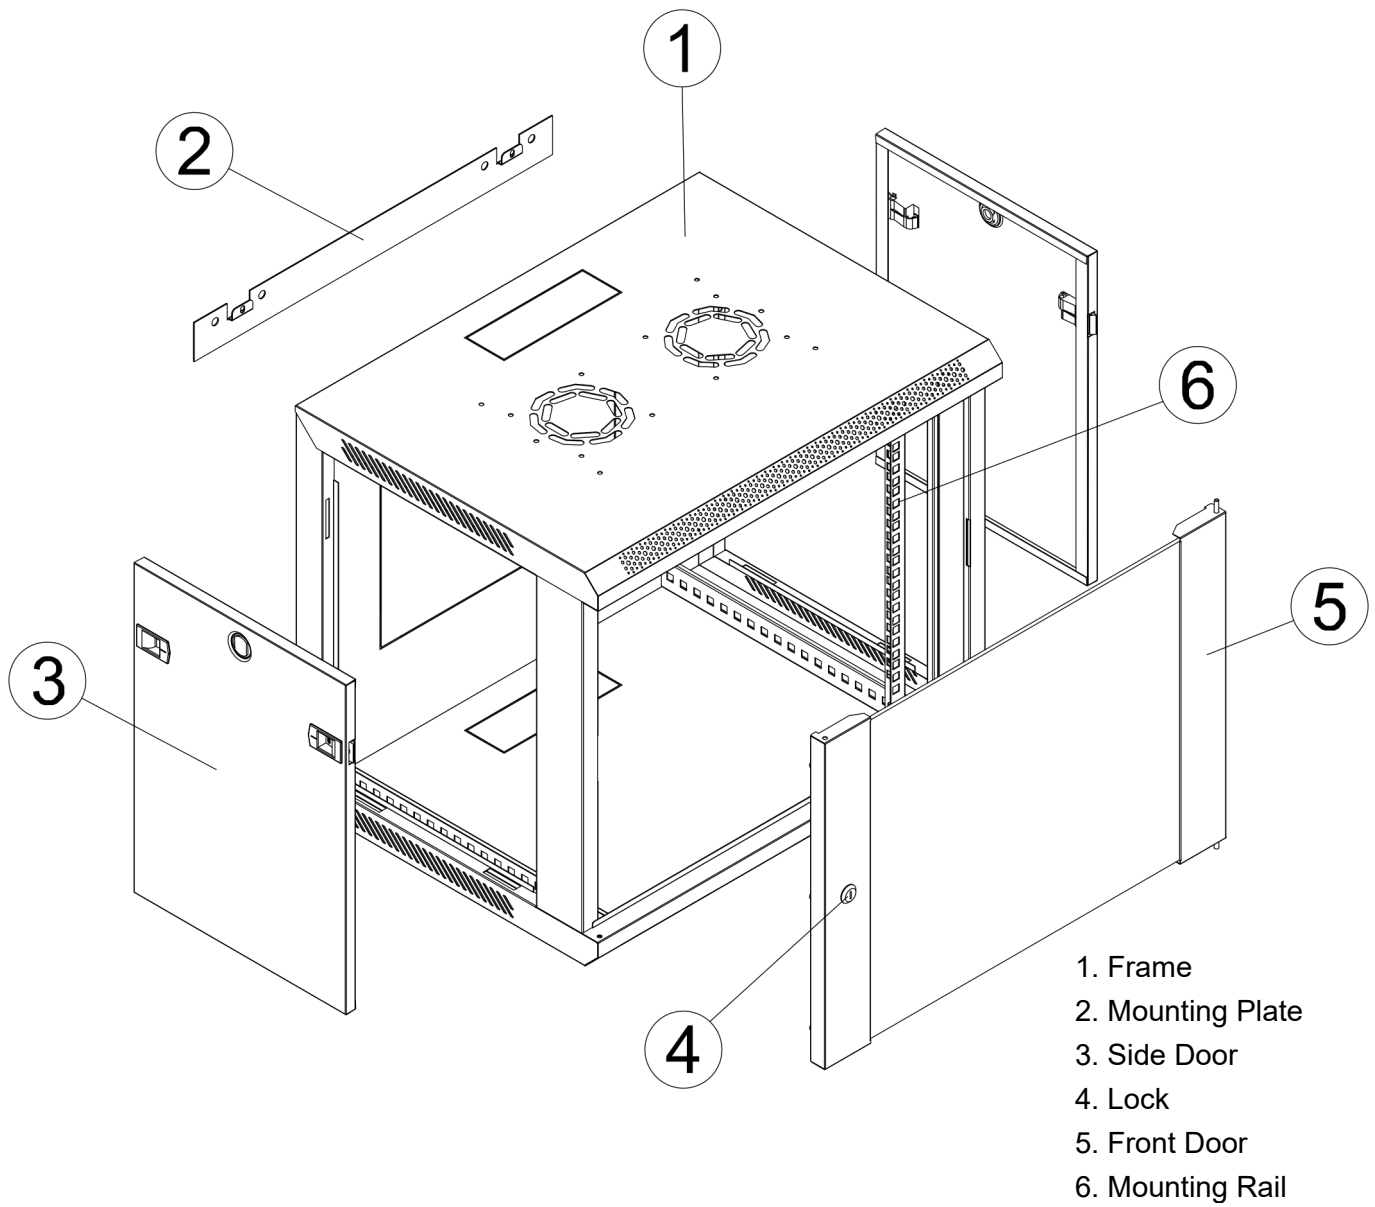


WALL CABINETS

DW16-645


Version: 09/25




TECHNICAL DRAWINGS



FRONT VIEW




LEFT VIEW




BACK VIEW

Mounting hole height distance" (Hd")


U	Hd
7	260 mm
9	349 mm
12	482 mm
16	660 mm



VERTICAL VIEW

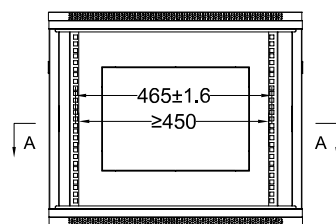

FRONT VIEW (GLASS EXCLUDING FRONT DOOR)

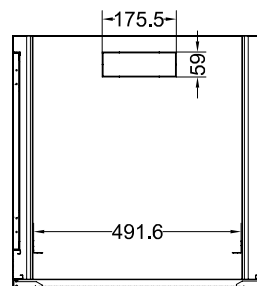

SECTION PLANE A-A



CableDoc
+43 720 51 88 11
info@cabledoc.com

Handelsstraße 8
2201 Seyring, Austria