


# Two-sectioned, 19” wall-mounted cabinets RBA

P/N: RBA-xx-AD5-CAY-A1

P/N: RBA-xx-AD6-CAY-A1

## Features

- welded construction with IP30 protection
- rear section opening enables an easy access to the installed devices from the backside
- hardened smoked glass door (standard)
- solid steel or perforated door (air permeability 80%) available upon request
- front vertical rails are continually adjustable
- rear vertical fixed rails
- frame of the cabinet and all removable parts are connected with earthing cables
- cable openings covered with breakout-type blanking panels located at the top, bottom and rear part of the cabinet
- protective blanking panel with a brush to seal the cabinet opening against dust penetration (1 pc)
- set of M6 screws and captive nuts (8 pcs)

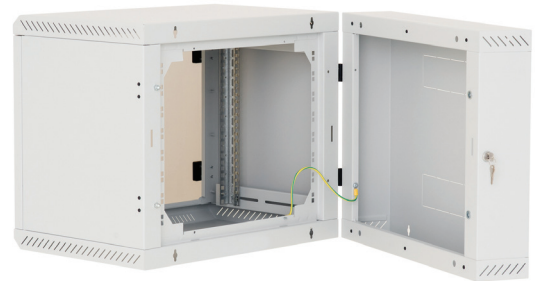

## Product codes

### Front door

RBA-xx-xxx-xAY-A1

A – hardened smoked glass door (standard)

C – solid steel door

L – perforated door

### Color



RBA-xx-xxx-xAY-A1

C – gray RAL 7035 (standard)

B – black RAL 9005

### Surface

structured, matte

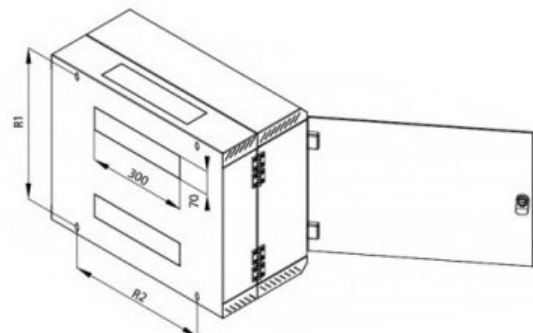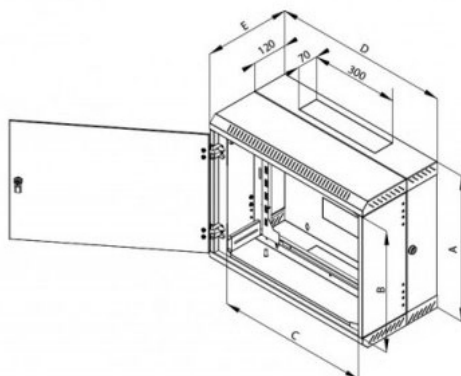

### Parameters AD5

Depth 515 mm, width 600 mm		A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	weight (kg)	capacity (kg)
<b>4U</b>	P/N: RBA-04-AD5-CAY-A1	280	175	516	600	515	15,1	20
<b>6U</b>	P/N: RBA-06-AD5-CAY-A1	370	265	516	600	515	16,9	20
<b>9U</b>	P/N: RBA-09-AD5-CAY-A1	500	395	516	600	515	20,1	25
<b>12U</b>	P/N: RBA-12-AD5-CAY-A1	635	530	516	600	515	23,5	25
<b>15U</b>	P/N: RBA-15-AD5-CAY-A1	770	665	516	600	515	27,0	30
<b>18U</b>	P/N: RBA-18-AD5-CAY-A1	900	795	516	600	515	30,1	30

### Parameters AD6

Depth 615 mm, width 600 mm		A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	weight (kg)	capacity (kg)
<b>4U</b>	P/N: RBA-04-AD6-CAY-A1	280	175	516	600	615	17,0	20
<b>6U</b>	P/N: RBA-06-AD6-CAY-A1	370	265	516	600	615	18,9	20
<b>9U</b>	P/N: RBA-09-AD6-CAY-A1	500	395	516	600	615	22,4	25
<b>12U</b>	P/N: RBA-12-AD6-CAY-A1	635	530	516	600	615	25,9	25
<b>15U</b>	P/N: RBA-15-AD6-CAY-A1	770	665	516	600	615	29,3	30
<b>18U</b>	P/N: RBA-18-AD6-CAY-A1	900	795	516	600	615	33,2	30